

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/358734254>

FUZZY CONTROL BASED ON PERTURB AND OBSERVE ALGORITHM FOR MAXIMUM POWER POINT TRACKING PHOTOVOLTAIC SYSTEMS

Conference Paper · February 2022

DOI: 10.6084/m9.figshare.19242570

CITATIONS

0

READS

70

3 authors:



Bouthaina Madaci
University of Constantine 1

7 PUBLICATIONS 57 CITATIONS

[SEE PROFILE](#)



Hacene Mellah
Université de Bouira

45 PUBLICATIONS 91 CITATIONS

[SEE PROFILE](#)



Kamel Eddine Hemsas
Ferhat Abbas University of Setif

73 PUBLICATIONS 389 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



Free & Online International Conference on Modern Electrical Engineering and Technology (ICMEET) [View project](#)



Modeling based on tests of Frequency Response Analysis (FRA) for the analysis, monitoring and diagnosis of the dynamic behavior of power transformers [View project](#)

FUZZY CONTROL BASED ON PERTURB AND OBSERVE ALGORITHM FOR MAXIMUM POWER POINT TRACKING PHOTOVOLTAIC SYSTEMS

Bouthaina Madaci¹, Hacene Mellah², Kamel Eddine Hemsas³

¹Department of Electrical Engineering, Ferhat Abbas University, Setif, Algeria, bmadaci964@gmail.com

²Department of Electrical Engineering, Bouira University, Bouira, Algeria, has.mel@gmail.com


³Department of Electrical Engineering, Ferhat Abbas University, Setif, Algeria, hemsas.kamel@gmail.com

I. INTRODUCTION

Photovoltaic (PV) energy is amongst the most helpful renewable and sustainable energy sources since it offers a variety of benefits. Because it has a number of advantages [1], including being free, having a long life of usage, requiring very little maintenance, having no moving parts, and not being polluted [2]. However, one of the most significant PV flaws is that it has a nonlinear feature with only one point of operation where the generated power is at its peak, known as the Maximum Power Point (MPP), which is affected by environmental conditions such as temperature and irradiance [2]. It is critical to working around the MPP in order to optimize the electricity generation. The maximum power tracking controller is required to harvest the maximum power from the Photovoltaics System (PVS) by managing the DC-DC converter in order to effectively pursue this goal, many researchers deal with this topic [3][4][5]. In order to improve the response of traditional MPPT techniques, the researchers are still improving these by mixing with them and the intelligent technics to form a hybrid and optimized approach. The performance and the intricacy of these approaches, as well as their topologies and hardware implementations, varies. However, these techniques have a mutual objective is to optimize the efficiency of the PVS. The Perturbation and Observation (P&O) algorithm is straightforward and low-cost [3][6]. However, it has a flaw in steady-state response instead of tracking the MPP consistently, it causes the system output to bounce about. Furthermore, the P&O technic is unable to adapt to environmental conditions variation since it is unable of distinguishing between changes in power owing to environmental causes and changes due to internal perturbations [3][6]. The main objectives of this work are tracking and operating at the MPP based on P&O and fuzzy logic controller (FLC), regulating the DC link voltage to 650 V. The suggested approach is simulated in Matlab/Simulink environment. The PVS has been tested with KC200GT solar panel under various operating conditions.



II. PV SYSTEM MODELING

A stand-alone PVS is shown in Fig. 1. In this study, we use a PVS compound of ten modules five connected in series and five connected in parallel in order to produce a power of 4 KW at the PVS output, a buck-boost converter, and a DC-AC inverter, including an LC output filter, DC-DC bidirectional converter is connected between DC-link and battery.

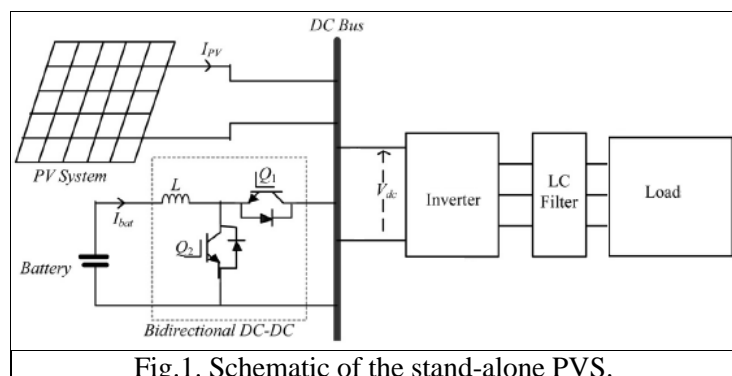

III. RESULT AND DISCUSSION

The electrical specifications, at standard test condition (solar radiation of 1000 W/m^2 and the temperature of 25C°). Fig.2 illustrates the PVS simulation results under various irradiation conditions; based on the findings, it can be concluded that the FLC based P&O (FLC-PO) MPPT algorithm outperforms both MPPT algorithms in terms of time response, oscillation, and stability, even conclusion for the output voltage as shown in Fig. 3. As can be shown in Fig. 4, the DC bus voltage (V_{dc}) agrees with the reference voltage ($V^*_{dc} = 650 \text{ V}$) with good precision and stability, with no dependency on solar irradiation fluctuations. The load current is illustrated by Figure 6. The load current has been analyzed and the results are presented in Fig. 7, where this current has a total harmonic distortion value of $\text{THD}_v = 0.93 \%$.

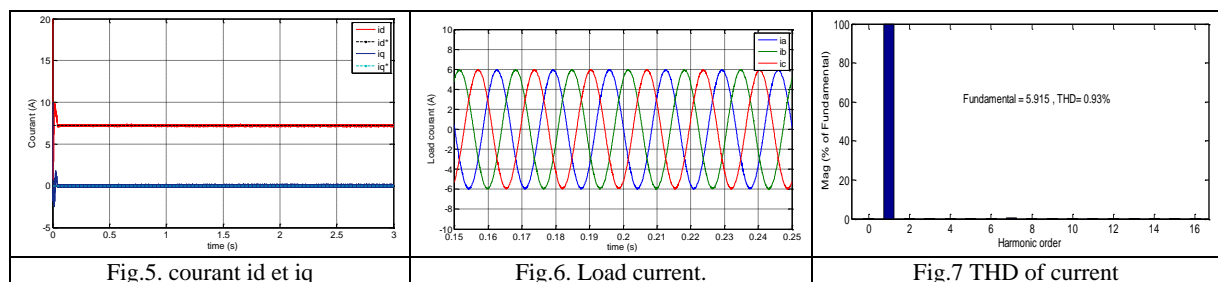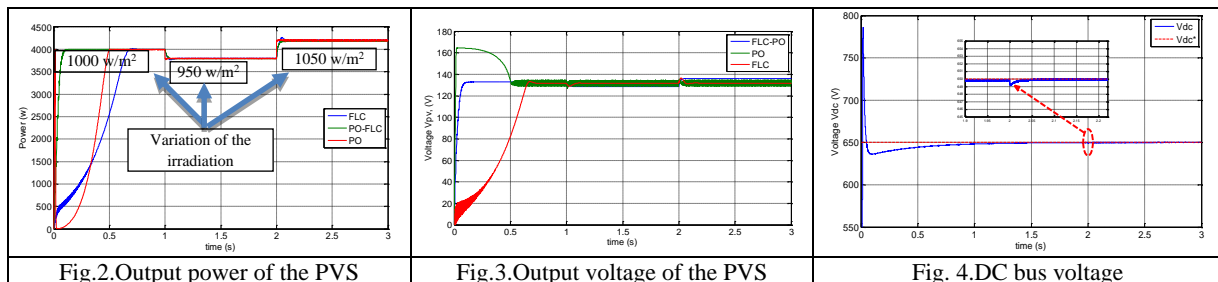

IV. CONCLUSION

This paper presents a simulation study of the PVS with MPPT techniques which is fuzzy logic controllers based perturb and observe algorithm. Simulation results show that FLC-PO MPPT is able to track the MPP with fast response and a less oscillating.

References

- [1] B. Subudhi and R. Pradhan, "A Comparative Study on Maximum Power Point Tracking Techniques for Photovoltaic Power Systems," *IEEE Trans. Sustain. Energy*, vol. 4, no. 1, pp. 89–98, Jan. 2013, doi: 10.1109/TSTE.2012.2202294.
- [2] R. Rahmani, M. Seyedmahmoudian, S. Mekhilef, and R. Yusof, "Implementation of Fuzzy Logic Maximum Power Point Tracking Controller for Photovoltaic System," *Am. J. Appl. Sci.*, vol. 10, no. 3, pp. 209–218, Mar. 2013, doi: 10.3844/AJASSP.2013.209.218.
- [3] H. Sahrroui, H. Mellah, S. Drid, and L. Chrifi-Alaoui, "Adaptive maximum power point tracking using neural networks for a photovoltaic systems according grid," *Electr. Eng. Electromechanics*, no. 5, pp. 57–66, Oct. 2021, doi: 10.20998/2074-272X.2021.5.08.
- [4] B. Madaci, R. Chenni, E. Kurt, and K. E. Hemsas, "Design and control of a stand-alone hybrid power system," *Int. J. Hydrogen Energy*, vol. 41, no. 29, pp. 12485–12496, Aug. 2016, doi: 10.1016/j.ijhydene.2016.01.117.
- [5] B. Madaci, R. Chenni, E. Kurt, and K. Hemsas, "Comparison Of Maximum Power Point Tracking Techniques For Solar Photovoltaic System," *Third Eur. Conf. Renew. Energy Syst.*, 2015.
- [6] P. Sahu and R. Dey, "An improved 2-level MPPT scheme for photovoltaic systems using a novel high-frequency learning based adjustable gain-MRAC controller," *Sci. Rep.*, vol. 11, no. 1, p. 23131, Dec. 2021, doi: 10.1038/s41598-021-02586-4.